



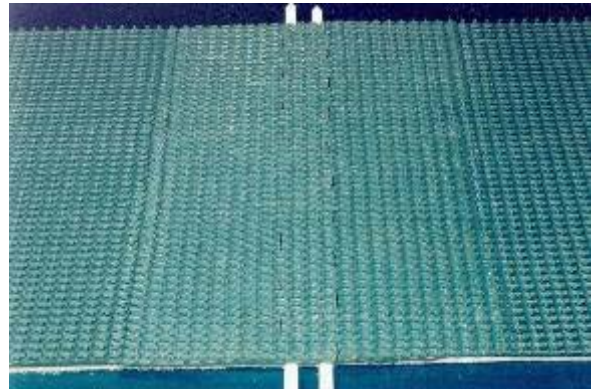


MLT

Flexible PVC- & PU lacing (patented)

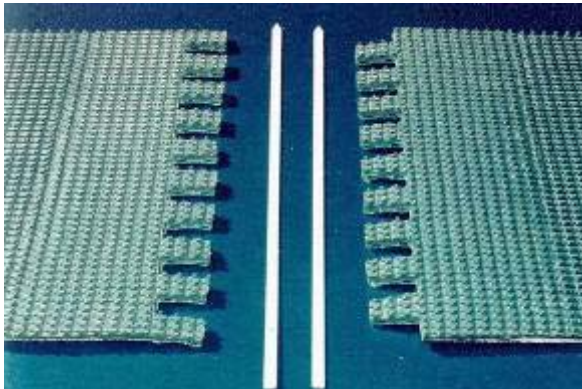

Removable splice without any metal pieces and with approx. the same thickness and color as the belt. No rotation axle, high working tension.

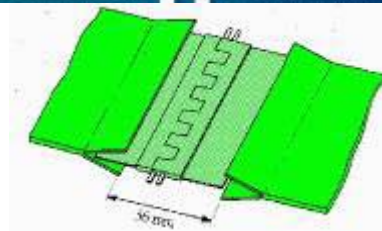

Flexible PVC & PU lacing

Belt thickness	1,7 to 6,7 mm depending on the type
Min. pulley diameter	50 to 250 mm depending on the type
Max. belt tension	4 to 20 N/mm depending on the type
Material	Polyurethane or PVC fabric reinforced and two polyacetal pins. PVC in white, black, grey, green or blue or on request. PU in White FDA 177 2600, green or bleu or on request.
Hinge material	2 polyacetal pins \varnothing 0,9 x 4,7 mm or \varnothing 1,4 x 4,7 mm.
Installation	By welding the fastener in the belt with a vulcanizing press after splitting the belt and inserting the fastener between the plies of the belt. Final connection with two polyacetal pins.
Packaging	Delivered in 1.000 mm length. Can be assembled side by side in order join a wider belt. The Polyacetal pin are available in 10 m rolls.

ACCESSORIES :

Cooling set and separator machine.

Connecting pin in stainless steel up to 3 m long.