




# MLT

## MR fasteners



MR2 fastener

**Fasteners with pre-mounted staples.**

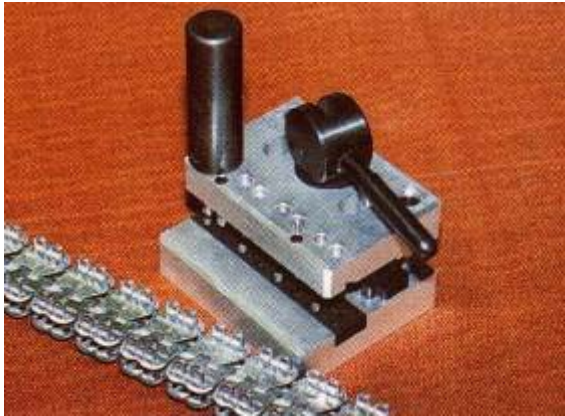

	<b>MR 1</b>	<b>MR 2</b>	<b>MR 3</b>
Belt thickness	1.5 to 3.2 mm	3.0 to 5.0 mm	4.8 to 6.4 mm
Min. pulley diameter	50 mm	75 mm	100 mm
Max. belt tension	19 N/mm	30 N/mm	38 N/mm
Material	Antimagnetic stainless steel AISI 316 or galvanized steel.		
Hinge material (*)	Polyamide covered stainless steel cable Ø 2.3 mm.	Polyamide covered stainless steel cable Ø 3.3 mm.	Polyamide covered stainless steel cable Ø 5.0 mm.
Installation	By using a hammer tool.		
Packaging	Standard boxes each containing complete 4 splices (8 strips + 8 hinge cables) for belt width from 300 mm to 1,500 mm in one piece.		

**ACCESSORIES :** Plastic hammer, Installation tool (minimum 100 mm) with punch.  
 (\*) Hinge pin are available on demand