



MLT

Self-Lock fasteners (patented)




SL 01 in full size

Top side


Can be installed on both sides!




Bottom side

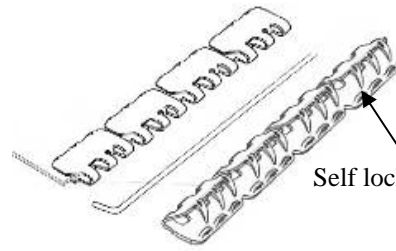

Self locking hooks !



Smooth surface !



Very quick and safe installation !

Fasteners for light duty belts with self locking hooks:

- Clamping effect through the lashes
- Locking of the hooks in the lashes

	SL 00	SL 01	SL 02	SL 03
Belt thickness	0.7 to 1.8 mm	1.6 to 2.4 mm	2.3 to 3.5 mm	3.4 to 4.5 mm
Min. pulley Ø	25 mm	40 mm	50 mm	60 mm
Max. belt tension	12 N/mm	16 N/mm	28 N/mm	35 N/mm
Material	Stainless steel AISI 316	Non magnetic stainless steel AISI 316 or galvanized steel.		
Installation	Buy using a hammer tool.			
Hinge material	Stainless steel pin 1,0 mm Ø	Stainless steel pin 1,5 mm Ø or polyamide covered stainless steel cable 1,5 mm Ø	Stainless steel pin 1,8 mm Ø or polyamide covered stainless steel cable 2,2 mm Ø	Stainless steel pin 2,5 mm Ø or polyamide covered stainless steel cable 2,5 mm Ø
Packaging :	In standard boxes each containing 4 splices or in pieces for requested belt width from 300 mm to 3.000 mm in one piece.			

ACCESSOIRES : Installation tool, punch and plastic hammer