




TUMBLE BLASTING BELTS for surface polishing

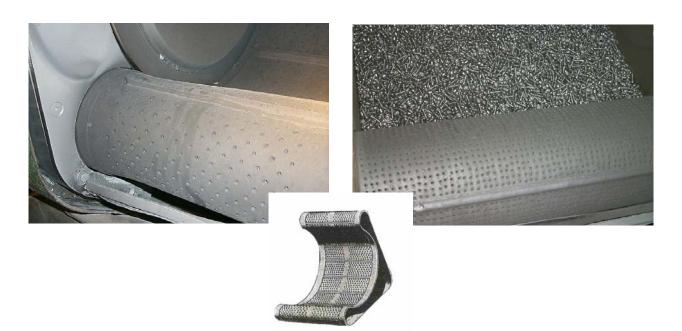

COVER: rubber (pneumatic quality)

abrasive, oil or heat resistant

OPERATING TENSION: from 50 to 75 N/mm

ENDLESS LENGTH: up to 6500 mm

WIDTH: up to 2000 mm

HOLES AREA: drilling as you need (hole sizes and patterns for almost

any tumble application)

(bearing area, holes number and diameter)

PERSONNAL FINISHING: with or without rib guides (moulded from the block)

On length or width

All our belts are manufactured in our workshops, endless, made to measure.

High turnover and exceptional resistance.