


Unibar® fasteners feature performance-proven Clipper® hooks welded to a common bar for easier installation with less downtime.

Performance-proven **Clipper® Hooks** For Simplified Installation

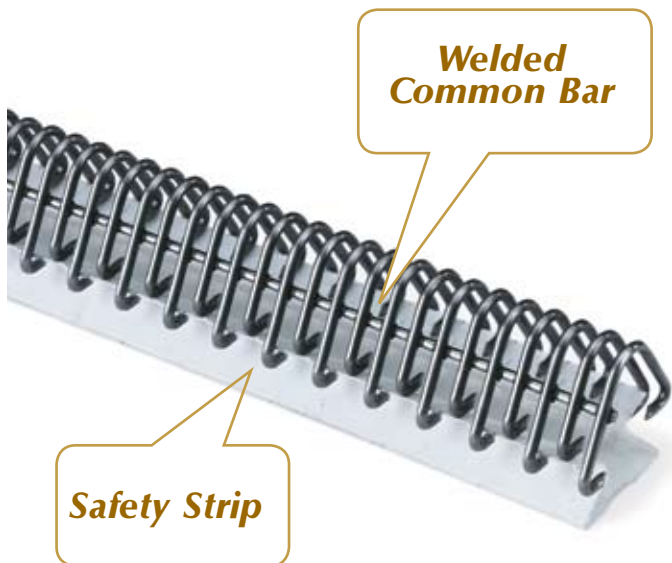

Faster.

- The welded common bar holds individual hook legs parallel during the installation process and creates a flat finished splice (no 'belt wave'). This combination eases the meshing of spliced belt ends and simplifies pin insertion.
- The Safety Strip can be quickly and easily removed either by sliding the paper off or gently pulling off the hook points.
- Available in 12" and 24" (300 and 600 mm) lengths standard; custom lengths available up to 60" (1500 mm), saving both installation time and money.

Safer.

- The Safety Strip keeps hook points covered to protect the user's fingers during handling and eliminates the product from being tangled during transportation.
- The risk of a single hook dislodging from the strip is virtually eliminated.

Smarter.

Each of the easier installation and reduced downtime features make Unibar wire hooks the Smart choice for these and many other applications:

- Package and Parts Handling
- Food Processing
- General Manufacturing
- Agriculture
- Filter Media

Unibar® Wire Hooks from Flexco

Specifications

Min. Pulley Diameter	Wire Thickness	Connecting Pin Size	Belt Thickness											
			Up to 3/64" 1.2mm	1/16" 1.6mm	3/32" 2.4mm	1/8" 3.2mm	5/32" 4.0mm	3/16" 4.8mm	7/32" 5.6mm	1/4" 6.4mm	17/64" 6.7mm	5/16" 7.9mm	11/32" 9.0mm	25/65" 10.0mm
15/16" 24mm	.036 x .027"	.065"/1.7mm	UCM36SL XSP											
	.036 x .027"	.065"/1.7mm		UCM36SL SP										
2" 51mm	.036 x .027"	.065"/1.7mm	UCM36 XSP											
	.036 x .027"	.065"/1.7mm		UCM36 SP*										
	.036 x .027"	.065"/1.7mm			UCM36*									
	.036 x .027"	.065"/1.7mm				UCM36 LP								
	.040"	.065"/1.7mm		UX1 SP*										
	.040"	.065"/1.7mm				UX1*								
	.054"	.093"/2.4mm				U2SP								
	.054"	.093"/2.4mm				U2								
3" 76mm	.054"	.093"/2.4mm						U3						
5" 127mm	.054"	.109"/2.8mm							U4					
	.054"	.125"/3.2mm									U5			
6" 152mm	.054"	.156"/4.0mm										U6		
7" 175mm	.054"	.156"/4.0mm											U7	

*Long Leg available; allow for 1" (25mm) larger pulley. Contact customer service for ordering information.

SL = Short Leg
XSP = Extra Short Point
SP = Short Point
LP = Long Point

Ordering Information

UX1, U2-U7: 430 Stainless Steel

Quantity - Length	UX1 SP	UX1	U2 SP	U2	U3	U4	U5	U6	U7
12 - 12" Strips	01184	01179	18851	18400	01255	01283	01305	18404	01294
10 - 24" Strips	01355	01356	18854	18477	18478	18479	01351	-	-

UCM36: 316 Stainless Steel

Quantity - Length	UCM36SLXSP	UCM36SLSP	UCM36XSP	UCM36SP	UCM36	UCM36LP
12 - 12" Strips	01315	01313	01312	01314	01309	01317
12 - 24" Strips	01319	01320	01321	01322	01323	-

UX1, U2-U5: 316 Stainless Steel

Quantity - Length	UX1 SP	UX1	U2	U3	U4	U5
12 - 12" Strips	01194	01189	18427	01258	18429	18430
10 - 24" Strips	01354	01353	18507	18508	18509	-

U2-U5: Coated Steel

Quantity - Length	U2 SP	U2	U3	U4	U5
12 - 12" Strips	18550	18370	01251	01279	01301
10 - 24" Strips	-	18453	18454	18455	01352



2525 Wisconsin Avenue
Downers Grove, IL 60515-4200 U.S.A.
Telephone: (630)-971-0150
Fax: (630)-971-1180
E-mail: info@flexco.com



www.flexco.com

Australia: 61-2-9680-3322 • England: 44-1274-600-942 • Germany: 49-7428-9406-0 • Mexico: 52-55-5674-5326 • Republic of South Africa: 27-11-608-4180

©2007 Flexible Steel Lacing Company. Clipper® and Unibar® are registered trademarks of Flexible Steel Lacing Company. 6/07-15. For Reorder: Item Code X0807