


optibelt ZRMD Doppel-Zahnflachriemen aus Polyurethan, metrisch Double Polyurethane Timing Belts, metric



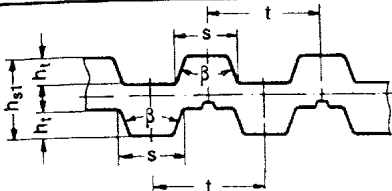

T 5 D / T 10 D

25	T 5 / 300	D
----	-----------	---

Doppel-Zahnflachriemen/
Double Timing Belts
Wirklänge/
Pitch length (mm)
Teilung/Pitch (5 mm)
Breite/Width (mm)

Type	t (mm)	h ₁ (mm)	h ₅₁ (mm)	s (mm)	β
T 5 D	5,0	1,20	3,40	2,65	40°
T 10 D	10,0	2,50	7,00	5,30	40°

**Aufbau: Polyurethan mit Stahlzugstrang/
Construction: Polyurethane with steel-wire cord**

Type T 5 D - Teilung/pitch 5 mm			Type T 10 D - Teilung/pitch 10 mm		
Artikel-Bezeichnung/ Belt No.	Wirklänge/ Pitch length (mm)	Anzahl der Zähne/ Number of teeth	Artikel-Bezeichnung/ Belt No.	Wirklänge/ Pitch length (mm)	Anzahl der Zähne/ Number of teeth
T5/ 150 D	150,00	30	T10/ 260 D	260,00	26
T5/ 300 D	300,00	60	T10/ 530 D	530,00	53
T5/ 350 D•	350,00	70	T10/ 600 D	600,00	60
T5/ 400 D•	400,00	80	T10/ 630 D	630,00	63
T5/ 410 D	410,00	82	T10/ 660 D	660,00	66
T5/ 450 D•	450,00	90	T10/ 700 D	700,00	70
T5/ 460 D	460,00	92	T10/ 720 D	720,00	72
T5/ 480 D	480,00	96	T10/ 750 D	750,00	75
T5/ 500 D	500,00	100	T10/ 800 D	800,00	80
T5/ 515 D	515,00	103	T10/ 840 D	840,00	84
T5/ 550 D	550,00	110	T10/ 900 D	900,00	90
T5/ 590 D	590,00	118	T10/ 980 D	980,00	98
T5/ 600 D	600,00	120	T10/1000 D•	1000,00	100
T5/ 620 D	620,00	124	T10/1100 D	1100,00	110
T5/ 650 D	650,00	130	T10/1200 D•	1200,00	120
T5/ 700 D	700,00	140	T10/1210 D	1210,00	121
T5/ 750 D	750,00	150	T10/1240 D	1240,00	124
T5/ 800 D	800,00	160	T10/1250 D	1250,00	125
T5/ 815 D	815,00	163	T10/1300 D•	1300,00	130
T5/ 860 D	860,00	172	T10/1320 D	1320,00	132
T5/ 900 D	900,00	180	T10/1350 D	1350,00	135
T5/ 940 D	940,00	188	T10/1400 D	1400,00	140
T5/1100 D	1100,00	220	T10/1420 D	1420,00	142
			T10/1500 D	1500,00	150
			T10/1600 D•	1600,00	160
			T10/1610 D	1610,00	161
			T10/1700 D	1700,00	170
			T10/1800 D	1800,00	180
			T10/1880 D	1880,00	188

